



Control Your Video

VIDEO WALLS VIDEO PROCESSORS
VIDEO MATRIX SWITCHES
EXTENDERS SPLITTERS WIRELESS
CABLES & ACCESSORIES

4X1 HDMI 2.0 SWITCHER W/IR/RS232/ETHERNET/ 4K/UHD SUPPORT



Model #: SW-HDM2-T4K-4X1

© 2016 Avenview Inc. All rights reserved.

The contents of this document are provided in connection with Avenview Inc. ("Avenview") products. Avenview makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. No license, whether express, implied, or otherwise, to any intellectual property rights is granted by this publication. Except as set forth in Avenview Standard Terms and Conditions of Sale, Avenview assumes no liability whatsoever, and claims any express or implied warranty, relating to its products are strictly prohibited.

Product Application & Market Sectors



Corporate



House Of Worship



Military



Residential



Education



Industrial



Medical



Aviation



TABLE OF CONTENTS

1.1	IMPORTANT SAFEGUARDS.....	3
1.2	SAFETY INSTRUCTIONS.....	3
1.3	REGULATORY NOTICES FEDERAL COMMUNICATIONS COMMISSION (FCC).....	4
2.	INTRODUCTION AND FEATURES.....	5
2.1	PACKAGE CONTENTS.....	6
2.2	BEFORE INSTALLATION.....	7
2.3	CABLE SPECIFICATIONS	7
2.4	APPLICATION DIAGRAM.....	8
3.	PANEL DESCRIPTION	9
	3.1 FRONT PANEL (SW-HDM2-T4K-4X1)	9
	3.2 REAR PANEL (SW-HDM2-T4K-4X1).....	10
4.	IR REMOTE AND CABLE DEFINITION	11
5.	D-SUB 9-PIN DEFINITIONS.....	12
6.	WEB GUI CONTROLS.....	13-16
7.	TELNET/RS232 CONTROL.....	17-19
8.	INSTALLATION.....	20
9.	GENERAL TROUBLESHOOTING	20
10.	SPECIFICATIONS	21



SECTION I: GETTING STARTED

I.1 IMPORTANT SAFEGUARDS

Please read all of these instructions carefully before you use the device. Save this manual for future reference.

What the warranty does not cover

- Any product, on which the serial number has been defaced, modified or removed.
- Damage, deterioration or malfunction resulting from:
- Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, or failure to follow instructions supplied with the product.
- Repair or attempted repair by anyone not authorized by us.
- Any damage of the product due to shipment.
- Removal or installation of the product.
- Causes external to the product, such as electric power fluctuation or failure.
- Use of supplies or parts not meeting our specifications.
- Normal wear and tear.
- Any other causes which does not relate to a product defect.
- Removal, installation, and set-up service charges.




I.2 SAFETY INSTRUCTIONS

The **Avenview SW-HDM2-T4K-4XI** HDMI Switcher set has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipments, the SW-HDM2-T4K-4XI should be used with care. Read the following safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- ⚠ Do not dismantle the housing or modify the module.
- ⚠ Dismantling the housing or modifying the module may result in electrical shock or burn.
- ⚠ Refer all servicing to qualified service personnel.
- ⚠ Do not attempt to service this product yourself as opening or removing housing may expose you to dangerous voltage or other hazards
- ⚠ Keep the module away from liquids.
- ⚠ Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
- ⚠ Have the module checked by a qualified service engineer before using it again.
- ⚠ Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.



This equipment has been tested and found to comply with Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. Any changes or modifications made to this equipment may void the user’s authority to operate this equipment.

Warningsymbols	Description
	<p>ONLY USE THE PROVIDED POWER CABLE OR POWER ADAPTER SUPPLIED. DO NOT TAMPER WITH THE ELECTRICAL PARTS. THIS MAY RESULT IN ELECTRICAL SHOCK OR BURN.</p>
	<p>DO NOT TAMPER WITH THE UNIT. DOING SO WILL VOID THE WARRANTY AND CONTINUED USE OF THE PRODUCT.</p>
	<p>THE VIDEO BOARDS ARE VERY SENSITIVE TO STATIC. PLEASE ENSURE IF RACK MOUNTED OR INSTALLED ON A SURFACE, IT SHOULD BE IN A GROUNDED ENVIROMENT.</p>

	<p>⚠ WARNING</p> <p>Read & understand user guide before using this device.</p> <p>Failure to follow the proper installation instructions could result in damage to the product and preventing expected results.</p>
---	--



2. INTRODUCTION

Avenview **4x1 HDMI 4K@60 Switcher** allows the transmission of video and multi-channel digital audio at 4K resolution. It allows the transmission of 18Gbps HDMI signal from any of its four HDMI 2.0 source inputs to one HDMI 2.0 with HDCP 2.2 support connected display. With supports 4K2K@60, 48-bit Deep Color, HDR (High Dynamic Range) audio and other features defined by HDMI 2.0 specifications. This device can be operated and controlled easily through front panel buttons, IR remote control, RS-232, Telnet or Web GUI controls.

Video Signals: 4K@60/UHD (Ultra HD) and Full HD 1080p@60 Hz/48-bit color depth.

Audio signals: PCM 2/5.1/7.1CH, Dolby Digital 2~5.1CH, DTS 2~5.1CH, Dolby Digital Plus, Dolby TrueHD, Dolby Atmos and DTS-HD Master Audio

Data Signals: Bi-Directional IR signals 30 KHz to 50 KHz.

FEATURES

- HDMI 2.0 (with HDR and 4K@60/UHD supported) and HDCP 2.2 compliant;
- Select any one of four HDMI 2.0 sources and display on a HDTV display with fast switching between sources;
- Supports HD resolutions up to UHD (3840x2160@24/25/30/50/60 & 4K (4096x2160 @24/25/30/50/60Hz)
- Supports HDR (10 bit 4:2:0)
- Supports HDMI 2.0 data rate from 18Gbps and 'Deep Color' up to 1080p/48-bit
- Supports selection of Standard (Fixed) or TV (Downstream) EDID settings
- Supports Audio pass-through of High-definition Audio formats PCM 2/5.1/7.1CH, Dolby Digital 2~5.1CH, DTS 2~5.1CH, Dolby Digital Plus, Dolby TrueHD, Dolby Atmos and DTS-HD Master Audio
- Supports IR Remote, Telnet, WebGUI control and RS-232

**Displaying HDMI 4K/HD resolution requires the standard High Speed HDMI cable and display for accurate results.*



2.1 PACKAGE CONTENTS

Before you start the installation of the switcher, please check the package contents.

1	4X1 HDMI 2.0 Switcher	1x	
2	IR EXTENDER	1x	
3	IR REMOTE	1x	
4	Power Adapter (5V/2.6A DC)	x1	
5	User's Manual		



2.2 BEFORE INSTALLATION

- Put the product in an even and stable location. If the product falls down or drops, it may cause an injury or malfunction.
Don't place the product in too high temperature (over 50°C), too low temperature (under 0°C) or high humidity.
Use the DC power adapter with correct specifications and supplied with the unit. If improper power supply is used the unit may malfunction and cause a fire.

2.3 CABLE SPECIFICATION

We highly recommend achieving best results with our SW-HDM2-T4K-2X1 you acquire a high quality 26 or 24 AWG HDMI cable with the below specifications to maintain signal integrity and distances.

Features

- Full UHD 4K/ 60 to 18Gbps High Speed at up to 48 Bit Deep Color
- UHD 4K/60 to 10.2 Gbps High Speed Deep Color up to 50ft (Active Series), 25ft Passive
- Full HD Up to 1080p/60 up to 75ft
- True Professional grade heavy-duty 24 or 26 gauge oxygen-free construction
- ProGrip connector utilizes up to 16 lbs of retention force to help keep connector in place
- SureLength length indicators on the connector heads make it easy to organize for installations
- Available in 7 colors for easy cable identification
- Up to 32 audio channels and 21:9 aspect ratio
- Simultaneous delivery of dual video and audio streams to multiple users
- Pro Grade Triple Shielding with 2x 100% coverage and 85% Premium Tinned Copper Braid construction
- Ethernet Capable
- 3D Ready
- Supports Deep Color and x.v. Color (Up to 48 Bit)
- 5.1/7.1 Lossless Dolby TrueHD and DTS-HD Surround Sound
- Audio Return Channel & Lip-sync
- ATC Certified
- 99.9% High Purity Copper Center Conductor
- Molded 24k Gold Plated HDMI male connectors on each end
- X-tra Flex CL3 rated jacket for easy installation
- RoHS Certified
- Lifetime Warranty



HDMI Premium Certified Cable label

This label ensures that the product was tested under the Premium HDMI Cable Certification Program

SECURE QR Code

Encrypted data in the QR code to identify the product with the Premium HDMI Cable app

SECURE fingerprint

Random elements in the hologram are recognized by the Premium HDMI Cable app, thus each label has its unique "fingerprint" and ensure the authenticity and quality of the product



SW-HDM2-T4K-4X1

CABLE INDEX

- HDMI CABLE ■
- INPUT SOURCE ■
- EDID MODE ■


4K@60(4096x2160/3840x2160) = 5m (16 feet) **HDMI 2.0**
1080p = 15m (50 feet) **HDMI 1.4**

LAYOUT 1



3. PANEL DESCRIPTION

3.1 FRONT PANEL (SW-HDM2-T4K-4XI)

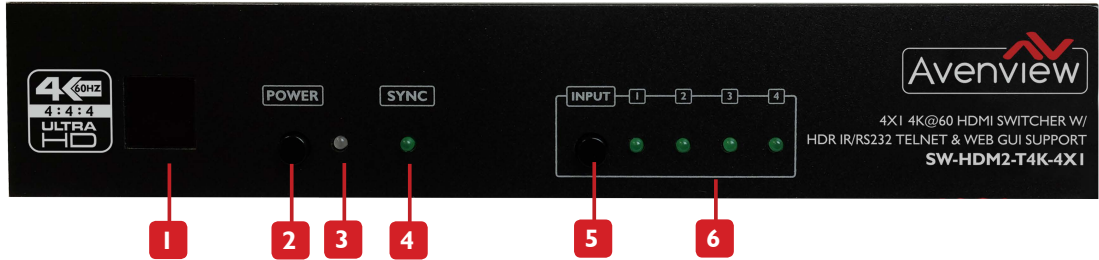


1. IR Window: IR receiver window receives remote control signals from the supplied IR Remote	2. Power Button: Powers the device ON or OFF. LED illuminate when the device is powered ON
3. Power Indicator: Illuminate Red when device is in Stand by mode, Illuminates green when device is ON.	4. SYNC: Illuminates green when connected to sink device.
5. Input: Select preferred source to display 1~4.	6. Input Source LED Indicator: Illuminates green when each source port is selected.

HDMI CABLE LENGTH (MAX)			
8-bit 1080p		12-bit 1080p	
Input	Output	Input	Output
10M	10M	10M	10M

HI SPEED 4K2K CABLE LENGTH (MAX)		
4K2K	HDMI In	HDMI Out
3840x2160p24	5m	5m
3840x2160p60	5m	5m



3.2 REAR PANEL (SW-HDM2-T4K-4X1)

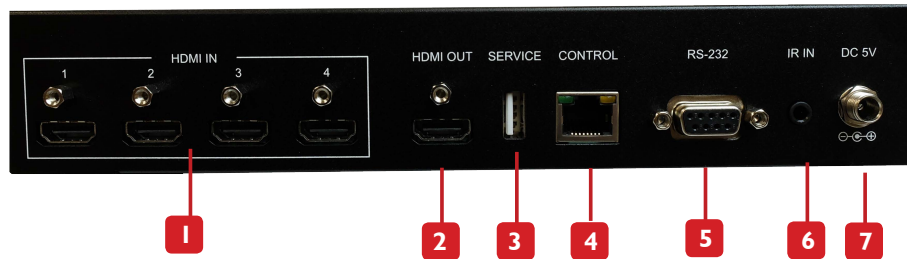


<p>1. HDMI IN: Connect input sources such as DVD/ Blu-ray players with HDMI cables.</p>	<p>2. HDMI Out: Connect to HDMI TV's/displays or monitors for both audio and video signal transmission.</p>
<p>3. USB 2.0: Service Slot for firmware update Please use a USB drive to update firmware.</p>	<p>4. LAN Control: Connect to an active network to be controlled via PC/Laptop for WEB GUI and Telnet control.</p>
<p>5. RS 232: Connect to PC or laptop with D-Sub 9-pin male cable for the transmission of RS-232 commands.</p>	<p>6. IR IN: Connect the IR Receiver cable supplied for receiving IR signal from the IR remote.</p>
<p>7. Power DC 5V: Connect the 5V DC 2.6A power supply included in the package. The power LED indicator on front panel will illuminate RED once connecting AC power.</p>	

Ethernet : Connect to an LAN network.The green LED will illuminate once connected to network and the yellow LED will blink during data transmission.





4. IR REMOTE AND CABLE DEFINITION

REMOTE CONTROL

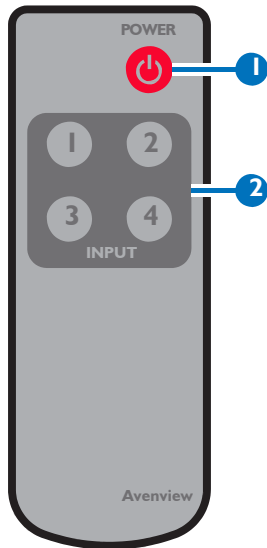

① **POWER:** Press to switch on the device or off to standby mode.

② **Input 1-4:** Press 1-4 to select the corresponding input port.

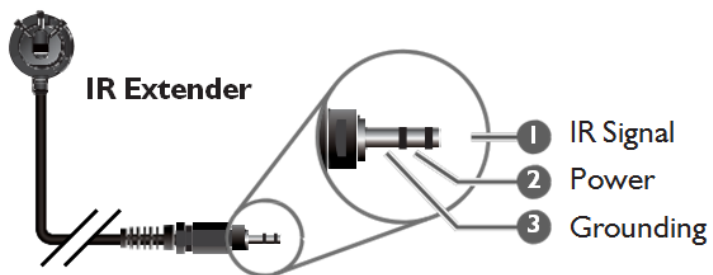

IR Socket

IR EXTENDER: plug in the IR Extender into the rear of the unit to receive all IR command signals from the supplied IR Remote control.



5. D-SUB 9-PIN DEFINITIONS

SW-HDM2-T4K-4X1	
PIN	Definition
1	NC
2	TxD
3	RxD
4	NC
5	GND
6	NC
7	NC
8	NC
9	NC



Third Party RS-232 Controller	
PIN	Definition
1	NC
2	TxD
3	RxD
4	NC
5	GND
6	NC
7	NC
8	NC
9	NC

Baud Rate: 19200bps

Data Bit: 8 bits

Parity: None

Stop Bit: 1

Flow Control: None



6. WEB GUI CONTROL

On a PC/Laptop that is connected to the same active network as the SW-HDM2-T4K-4X1, open a web browser and type device IP address (can be identified from RS-232's help command or use the default IP: 192.168.1.50) on the web address entry bar. The browser will display the device status, control and User settings.

All functions, controls and settings can be selected/modified from a single web page allowing easy access and user friendly experience to all features.

The screenshot displays the web GUI control interface for the SW-HDM2-T4K-4X1 device. The interface is organized into several functional sections:

- POWER:** A dropdown menu set to "OFF".
- ROUTING:** A dropdown menu for "Output From:" set to "PASAONSI".
- SOURCE DETECT:** Four input status indicators (INPUT1-4) all set to "OFF".
- STATUS:** "HDMI OUT:" set to "PASAONSI" and "VERSION:" set to "V1.3C". Includes "RESET" and "REBOOT" buttons.
- EDID:** "Mode:" set to "APPOINT". EDID IN1-4 are set to "8/2D.PCM/720p", "8/2D.PCM/720p", "8/2D.PCM/1080p", and "8/2D.PCM/4K2K_Y420" respectively.
- HDCP CONTROL:** Four input status indicators (INPUT1-4) all set to "Standard".
- HDMI OUT INFO:** Fields for Type, Manuf. Name, Native Resolution, Color Depth, 3D, 4K2K, and Audio Format, all currently showing dashes.
- NAMING:** Input fields for INPUT1 (PASAONSI), INPUT2 (SONY), INPUT3 (PS3), INPUT4 (CPHD-3), and OUTPUT (VA-1838). Includes a "SAVE" button.
- NETWORK SETTING:** Fields for MAC (12:34:56:78:9abc), IP Mode (DHCP), IP Address (192.168.6.86), Net Mask (255.255.255.0), Gateway (192.168.6.254), HTTP Port (80), and Telnet Port (23). Includes an "APPLY" button.


6.1 Power On/Off

The unit can be powered on/off from power tab.




6.2 Routing

Input source can be selected from Routing tab.



6.3 Source Detection

Selected Input source will display 'ON' when corresponding port is selected.



6.4 Status

- (1) This tab displays current active HDMI input port for HDMI output and the device's firmware version.
- (2) "RESET" button restores device to factory default settings.
- (3) "REBOOT" Restarts the device.



6.5 EDID



Two EDID modes are available:

(1) EDID mode "**ALL**" allows to set all HDMI to the same EDID.

Available EDID modes are:

- 8/2D/PCM/720p
- Sink
- 8/2D/PCM/1080p
- 8/2D/PCM2/4K3G
- 8/2D/PCM2 4K Y420
- 8/2D/PCM/4K 6G

(2) EDID mode "**APPOINT**" allows different EDID for each HDMI input



6.6 HDCP CONTROL

Two HDCP modes are available: **Standard and Apple**

Standard mode is required when using all other devices connected to the unit.


Apple mode is required when using Apple brand products.

6.7 HDMI OUTPUT INFO

This info tab displays the information of the HDMI output:-

Type, Manufacturer name, native resolution, color depth, 3D/4K Support Yes/No


Also audio format.

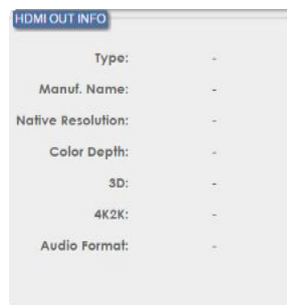

6.7 CUSTOM HDMI INPUT LABEL

The user can easily rename the four HDMI inputs to allow easy identification of what source is connected to manage the switching .

Please click SAVE button to complete the process when finished.

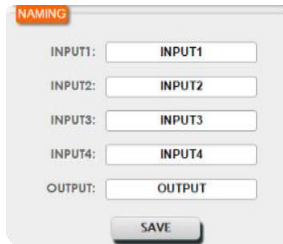


The screenshot shows a window titled "NAMING" with five input fields and a "SAVE" button. The fields are labeled INPUT1, INPUT2, INPUT3, INPUT4, and OUTPUT, each containing the text "INPUT1" through "INPUT4" and "OUTPUT" respectively.

6.8 NETWORK SETTINGS

Within this TAB the user can set their preferred Network IP mode :-

DHCP, STATIC, IP Address, Net Mask, Gateway, HTTP Port and Telnet port

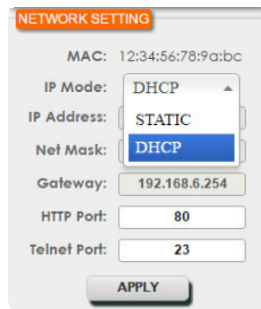

The screenshot shows a window titled "NETWORK SETTING" with various configuration options. The MAC address is 12:34:56:78:9a:bc. The IP Mode is set to DHCP. The IP Address is set to STATIC. The Net Mask is set to DHCP. The Gateway is 192.168.6.254. The HTTP Port is 80. The Telnet Port is 23. There is an "APPLY" button at the bottom.



7. TELNET CONTROL

Please follow the steps to use telnet control,



STEP1 Please ensure that both the unit and the PC/Laptop are connected to the same active network.

To access Telnet in Windows 7, click on the “Start” menu and type “cmd” in the search field, then press “Enter”.

Under Windows XP go to the “Start” menu, click on "Run", type "cmd" then press “Enter”.

Under Mac OS X, go to Go→Applications→Utilities→Terminal

See below for reference.

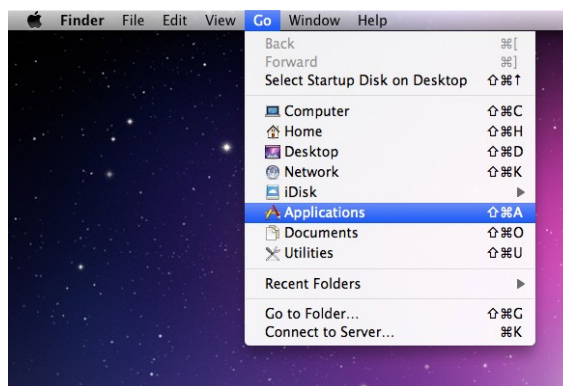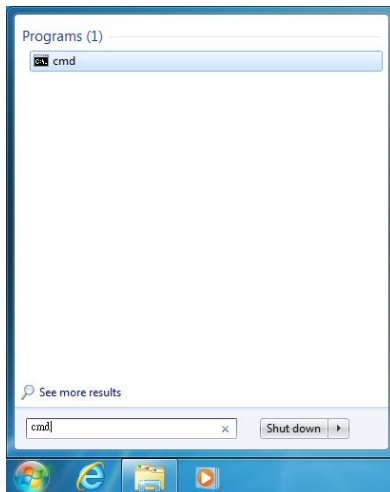

As the below caption when the command prompt type "telnet", then the IP address, and hit enter.

```
Microsoft Windows [Version 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Users\Administrator>telnet 192.168.XX.XX 23
```

Type “Help” or “?” then hit enter to bring up all available commands.



8. RS 232 PROTOCOLS

Command Name	Command Description	Parameter
?	Print this message, code entry is not CASE SENSITIVE	NONE
HELP	Print this message, code entry is not CASE SENSITIVE	NONE
P0	POWER OFF	NONE
P1	POWER ON	NONE
INNAME	SET/SHOW ALL INPUT NAME	INNAME [1~4][8 char]
OUTNAME	SET/SHOW HDMI OUTPUT NAME	OUTNAME [8 char]
OUT	SET/SHOW OUT SOURCE	OUT [1~4]
SOURCEDET	SHOW INPUT INFORMATION	NONE
SINKINFO	SHOW OUTPUT	NONE
HDCPIN	SET/SHOW INPUT HDCP STATUS	HDCPIN [1~4] [0:STANDARD/1:APPLE]
EDIDMODE	SET/SHOW EDID MODE TYPE	EDIDMODE [0:APPOINT/1:ALL]
EDIDALL	SET/SHOW EDID ALL CONTENT	EDIDALL [0~5]
EDIDIN	SET/SHOW EDID INPUT CONTENT	EDIDIN [1~4] [0:Sink
FADEFAULT	SET ALL CONFIGURATIONS TO FACTORY DEFAULT	NONE
REBOOT	REBOOT DEVICE	NONE



8. RS 232 PROTOCOLS

Command Name	Command Description	Parameter
VER	DISPLAY FIRMWARE VERSION	NONE
IPCONFIG	DISPLAY THE CURRENT IP CONFIG	NONE
SIPADDR	SET ETHERNET IP ADDRESS	SIPADDR X.X.X.X (X:0~255)
SNETMASK	SET ETHERNET NETMASK	SNETMASK X.X.X.X (X:0~255)
SGATEWAY	SET ETHERNET GATEWAY	SGATEWAY X.X.X.X (X:0~255)
HTTPPORT	SET HTTP PORT NUMBER	HTTPPORT N (N=0~65535)
TELNETPORT	SET TELNET PORT NUMBER	TELNETPORT N
IPMODE	SET IP MODE	IPMODE N (N=0-STATIC, 1-DHCP)
IPSTATIC	Set static IP address	IPSTATIC [Address] [Netmask][Gateway]
SETMAC	Write MAC Address to <u>eprom</u>	NONE
READMAC	Read MAC Address from <u>eprom</u>	NONE
UPDATE	UPDATE Firmware <MCU/VS/ZVS>	NONE



9. INSTALLATION (SW-HDM2-T4K-4X1)

To setup Avenview SW-HDM2-T4K-4X1 please follow these steps for connecting to a device:

1. Turn off all devices including monitors / TV
2. Connect the four sources with HDMI cables to the switcher's inputs labelled HDMI IN
3. Connect the display with HDMI cable to the switcher's output labelled HDMI OUT
4. (Optional) Connect an Ethernet cable to the port labelled CONTROL to control the unit via WEB GUI
5. (Optional) Connect a RS-232 cable to the port labelled RS-232 to control the unit via PC/Third Party system
6. Plug the supplied power adapter into the DC 5V labelled port DC5V then plug the other end into the power outlet
7. Press the Power Switch located on the front panel to power on the unit (LED will illuminate Green)

Avenview SW-HDM2-T4K-4X1 is supplied with an IR Extension cable to allow the unit to be placed with a cabinet or rack and be controlled from a distance with the IR Remote.

NOTE: If using the IR remote control, the preferred IR distance is within 23 feet (7 meters)

10. GENERAL TROUBLESHOOTING

PROBLEM	SOLUTION
NO IMAGE	<ul style="list-style-type: none">• Check if connection to the source and the display are correct.• Ensure that display device supports the following resolutions up to 4K (3840x2160@24/25/30/50/60 and 4096x2160 @24/25/30/50/60Hz)• Ensure premium quality 26 or 24 AWG HDMI cables are used and the distance is within 10 Meters (30 Feet)• Please use the supplied power supply-DC 5V/2.6A DC
NO RESPONSE	<ul style="list-style-type: none">• If the switch fails to respond to commands from the RS232, IR, or the front panel, contact Customer Support.
Apple TV NO IMAGE	<ul style="list-style-type: none">• Please see the Section HDCP Control to set the unit to APPLE Mode via RS232 or WEB GUI.



11. SPECIFICATIONS

ITEM	DESCRIPTION
UNITS	SW-HDM2-T4K-4X1
UNIT DESCRIPTION	4X1 4K@60/UHD HDMI Switcher with IR/RS-232/ Support
HDCP	YES
VIDEO BANDWIDTH	600 MHz (6 Gbps)
SUPPORTED RESOLUTIONS	480i~UHD (3840x2160@24/25/30/50/60 & 4K (4096x2160@24/25/30/50/60Hz)
AUDIO SUPPORT	PCM 2/5.1/7.1CH, Dolby Digital 2~5.1CH, DTS 2~5.1CH, Dolby Digital Plus, Dolby TrueHD, Dolby Atmos and DTS-HD Master Audio
ESD PROTECTION	Human body model — $\pm 12\text{kV}$ (air-gap discharge) & $\pm 8\text{kV}$ (contact discharge)
INPUT	4×HDMI 1× IR 1× RS 232 1× ETHERNET 1× USB (Factory use)
OUTPUT	1× HDMI
HDMI CONNECTOR	Type A (19 pin female) Sampling Rate 32kHz ~ 192 kHz
IR FREQUENCY	38kHz
DIMENSIONS (L X W X H)	9.4" x 4.0" x 1.7" 240 mm (L) x 104 mm (W) x 43mm (H)
WEIGHT	0.79kg / 1.74lbs
POWER SUPPLY	5VDC /2.6A (US/EU standards, CE/FCC/UL certified)
POWER CONSUMPTION	5.83W Stanby Mode (1.1W)
ENVIRONMENTAL	
OPERATING TEMPERATURE	32° ~ 104° F (0° to 40° C)
STORAGE TEMPERATURE	-4° ~ 140° F (-20° ~ 60° C)
RELATIVE HUMIDITY	20~90 % RH (non-condensing)



Avenview Warranty Certificate

AVENVIEW CORP. ("Avenview") warrants Avenview-branded product(s) contained in the original packaging against defects in materials and workmanship when used normally in accordance with Avenview's enclosed manual guidelines for a period of THREE (3) YEARS from the date of original retail purchase - Warranty Period. Avenview's published guidelines include but are not limited to information contained in technical specifications, user manuals and service communications.

LABOR: During the Warranty Period of THREE (3) YEARS, Avenview will repair or replace the product(s) at no cost using new or used parts equivalent to novel performance and reliability if the product(s) is determined to have abide by Avenview's published guidelines. Cost of Labor applicable to product(s) after Warranty Period. For labor costs, please contact support@avenview.com.

PARTS: During the Warranty Period of THREE (3) YEARS, Avenview will supply new or rebuilt replacements in exchange for defective parts of the product(s) at no cost if the product(s) is determined to have abide by Avenview's published guidelines. Cost of Parts applicable to product(s) after Warranty Period. For part(s) costs, please contact support@avenview.com.

To obtain Warranty: (a) proof of purchase in the form of a bill of sale or receipted invoice reflecting that the registered product(s) is within warranty period must be presented to obtain warranty service; (b) product(s) must be registered at time of purchase. Failure to do so will result in applicable parts and labor charges. Returning product(s) must be shipped in Avenview's original packaging or in packaging pertaining equal degree of protection to Avenview's. Both Avenview and purchaser are responsible for freight charges and brokerages when shipping the product(s) to the receiver.

NOT COVERED BY THIS WARRANTY

This warranty does not apply to any non-Avenview branded product(s); non-registered Avenview product(s). This warranty does not apply: (a) to cosmetic damage, including but not limited to scratches, dents and broken cords; (b) to damage caused by use with another product; (c) to damage caused by accident, abuse, misuse, liquid contact, fire, earthquake or other external cause; (d) to damage caused by operating the Avenview product(s) outside Avenview's manuals or guidelines; (e) to damage caused by service performed by anyone who is not a representative of Avenview or an Avenview authorized personnel; (f) to defects caused by normal wear and tear or otherwise due to the normal aging of the Avenview product(s), or (g) if any serial number has been removed or defaced from the Avenview product(s).

AVENVIEW IS NOT LIABLE FOR DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY, INCLUDING BUT NOT LIMITED TO LOSS OF USE; LOSS OF REVENUE; LOSS OF ACTUAL OR ANTICIPATED PROFITS (INCLUDING LOSS OF PROFITS ON CONTRACTS); LOSS OF THE USE OF MONEY; LOSS OF ANTICIPATED SAVINGS; LOSS OF BUSINESS; LOSS OF OPPORTUNITY; LOSS OF GOODWILL; LOSS OF REPUTATION; LOSS OF, DAMAGE TO, COMPROMISE OR CORRUPTION OF DATA; OR ANY INDIRECT OR CONSEQUENTIAL LOSS OR DAMAGE REPAIR OR REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS THE EXCLUSIVE REMEDY OF THE CONSUMER.

Some states do not allow the inclusion or limitation of incidental or consequential damages, or allow limitations on duration implements of the Warranty Period; therefore the above limitations or exclusions may not be applicable to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.



275 Woodward Avenue, Kenmore, NY 14217
1.866.508.0269





Control Your Video

TECHNICAL SUPPORT

CONTACT US



Phone: 1 (866) 508 0269



Email: support@avenview.com



USA Head Office Avenview Corp. 275 Woodward Avenue Kenmore, NY 14217

USA Head Office

Office Avenview Corp.
275 Woodward Avenue
Kenmore, NY14217
Phone: +1.716.218.4100
Fax: +1.866.387-8764
Email: info@avenview.com

Canada Sales

Avenview
151 Esna Park Drive, Units 11 & 12
Markham, Ontario, L3R3B1
Phone: 1.905.907.0525
Fax: 1.866.387.8764
Email: info@avenview.com

Avenview Europe

Avenview Europe
Demkaweg 11
3555 HW Utrecht
Netherlands
Phone: +31(0)85 2100 613
Email: info@avenview.eu

Avenview Hong Kong

Unit 8, 6/f., Kwai Cheong Centre,
50 Kwai Cheong Road,
Kwai Chung, N.T.
Hong kong
Phone: 852.3575.9585
Email: wenxi@avenview.com

Disclaimer

While every precaution has been taken in the preparation of this document, Avenview Inc. assumes no liability with respect to the operation or use of Avenview hardware, software or other products and documentation described herein, for any act or omission of Avenview concerning such products or this documentation, for any interruption of service, loss or interruption of business, loss of anticipatory profits, or for punitive, incidental or consequential damages in connection with the furnishing, performance, or use of the Avenview hardware, software, or other products and documentation provided herein.

Avenview Inc. reserves the right to make changes without further notice to a product or system described herein to improve reliability, function or design. With respect to Avenview products which this document relates, Avenview disclaims all express or implied warranties regarding such products, including but not limited to, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement.